

2x4 COMPOSITE or TREATED
LUMBER NAIL BOARD -
RECESSED 3/4" DOWN FROM
TOP OF SIDEWALK

2-4" OF #250 MIX OR
CRUSHED STONE

OPTIONAL 1-2 POUNDS
SILICA SAND INFILL

TURF

NATURAL GRASS

4" TRENCH EDGE


30 PENNY GALVANIZED NAILS OR
5-6" STAPLES EVERY 6" AROUND
PERIMETER

OPTIONAL WEED BARRIER or
GEOMEMBRANE

COMPACTED SUBGRADE

CONCRETE
SIDEWALK or
CURB

GLUE NAIL BOARD TO SIDEWALK WITH
OUTDOOR ADHESIVE - PL PREMIUM
POLYURETHANE ADHESIVE OR EQUAL.
FASTEN EVERY 2' O.C. with CONCRETE
SCREWS

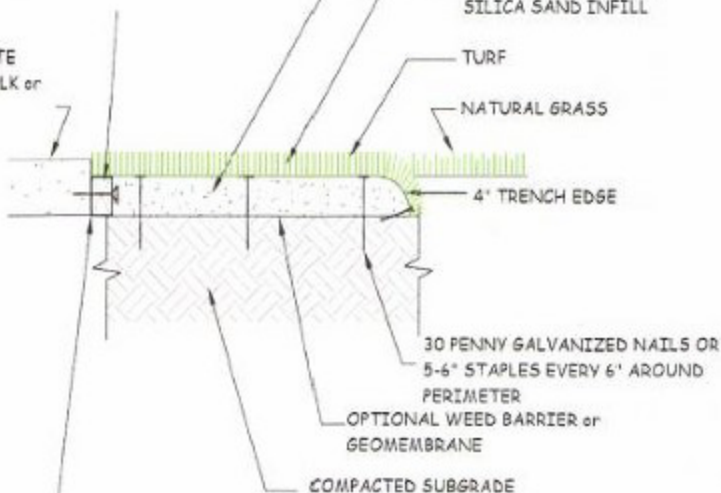

PERIMETER COMPOSITE
NAILER BOARD with
GALVANIZED NAILS OR
SCREWS AT 4" O.C.

OPTIONAL WEED BARRIER or
GEOMEMBRANE

ARTIFICIAL TURF

2-4" of #250 MIX or
CRUSHED STONE

OPTIONAL 3/4" STONE
DRAINAGE LAYER

COMPACTED SUBGRADE

